

Description

The ICM-430 intercom station is used with the DXI's SAB-400 and SAB-401 station audio boards, or the DXL's SCC-400 and SCC401 station control cards. It is suitable for use in high security areas and is designed for superb audio clarity in reverberant acoustic environments. The ICM-430 incorporates an integral speaker/microphone, and circuitry for transmission of all station audio, power, and switch closures over a single shielded pair cable for reduced installation costs. The ICM-430 mounts in a standard three-gang electrical box.

Features



- internal termination circuitry for line fault supervision to detect open and short circuit wiring faults
- half duplex audio channel to the intercom exchange
- internal preamplifier for superior audio sensitivity
- switches are programmable for call request, program selection, or other functions
- steel offset grille baffle plate protects the speaker from physical damage
- conformal coating protects all electronic components from moisture in weather resistant version
- stainless steel hardware and baffle plate in weather resistant versions
- 11 ga heavy-duty brushed stainless steel faceplate with camfired edges
- 2.5" mylar cone speaker
- choice of 0, 1, or 2 vandal resistant long life switches
- optional solid metal piezo-electric switches provide enhanced vandal resistance and extremely long life due to the total absence of moving parts
- mechanical switches available in standard, soft action, low temperature, or mushroom button versions
- available without internal speaker for remote speaker mounting
- single shielded twisted pair 22 ga cabling for audio and switch closures
- no connection to shield drain wire at the intercom station
- 4 terminal depluggable MTA100 series connector eliminates wire stripping during servicing and installation
- mounts on standard 3 gang electrical box
- compatible with all standard #6-32 mounting hardware allowing any type of security screw to be used



Specifications

Physical	4.5" H x 6.4" W x 1.75" D (114 x 163 x 45 mm)
Faceplate	
Heavy-duty	11 ga brushed stainless steel
Environmental	
Operating Temperature	32 to 122 °F (0 to 50 °C)
Weather resistant Intercom	-40 to 122 °F (-40 to 50 °C)
Storage Temperature	-40 to 158 °F (-40 to 70 °C)
Humidity	0 to 95 % non-condensing
Field Connections	4 pin MTA100 connector
Cabling	22 ga shielded twisted pair 2500 ft (750 m) maximum length
Switch Lifetime	
Standard	1 million operations
Piezo-electric switch	50 million operations
Speaker	2.5" (64 mm) mylar cone
Speaker Level	82 dB SPL at 1 m at 1 W
Microphone Level	10 mV at 74 dB SPL

Mechanical

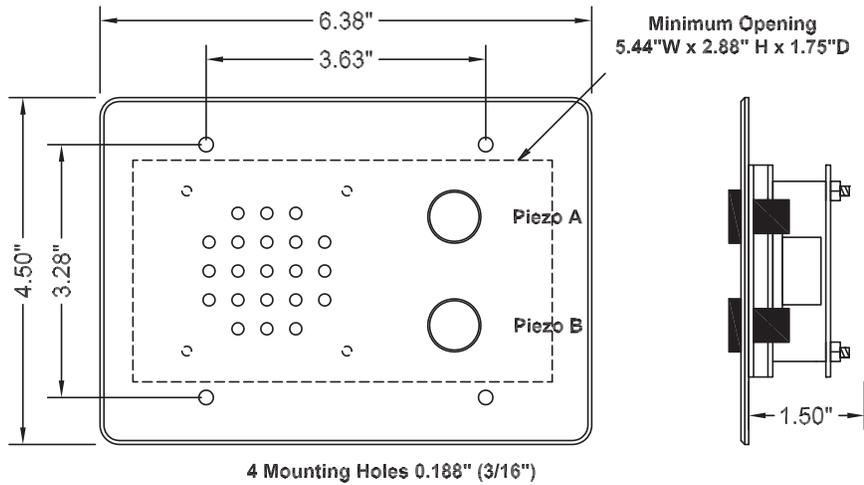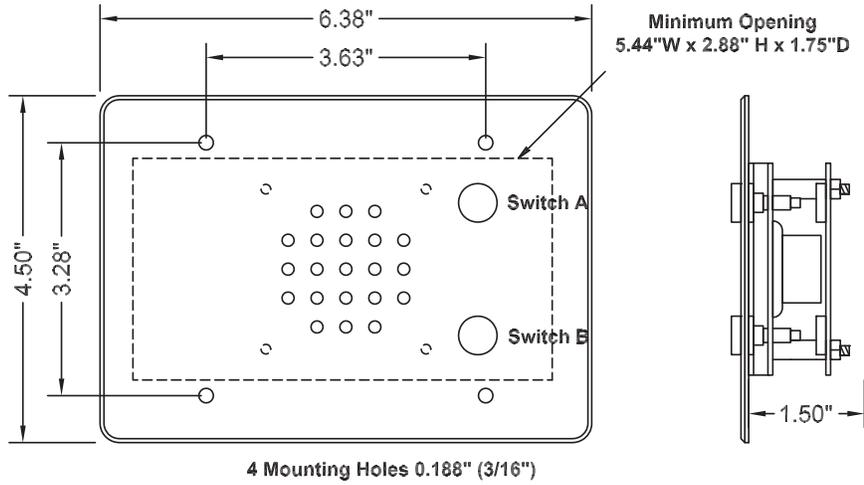

Ordering Information

Part number ICM-430-ABC-DEF

- | | |
|---|--|
| <p>A faceplate options</p> <ul style="list-style-type: none"> 1 14 gauge (no longer available) 2 11 gauge 3 11 gauge - labeled "Call" 4 11 gauge - labeled "Call" & "Program" 5 11 gauge - labeled "Call" & "Door" <p>B weather resistant options</p> <ul style="list-style-type: none"> 1 standard (interior) 2 weather resistant (exterior) <p>C switch B options</p> <ul style="list-style-type: none"> 0 none 1 standard 2 cord jack* 3 piezo-electric switch 4 none with header 5 standard with header 6 mini-piezo 7 anti vandal 8 red mushroom button | <p>D switch A options</p> <ul style="list-style-type: none"> 0 none 1 standard 3 piezo-electric switch 4 none with header 5 standard with header 6 mini-piezo 7 anti vandal <p>E options</p> <ul style="list-style-type: none"> 0 none <p>F internal speaker options</p> <ul style="list-style-type: none"> 1 mylar cone |
|---|--|

* pushbutton call cord must be ordered separately

Document # DS-ICM-430-2.18 • Copyright © 1999 Harding Instrument Co. Ltd. • All Specifications subject to change without notice • Printed in Canada



9564 Yellowhead Trail NW Tel 780.462.7100
Edmonton, AB T5G 0W4 Fax 780.450.8396
sales@harding.ca www.harding.ca



Represented by: